



## ■ PRODUCT DRAWING

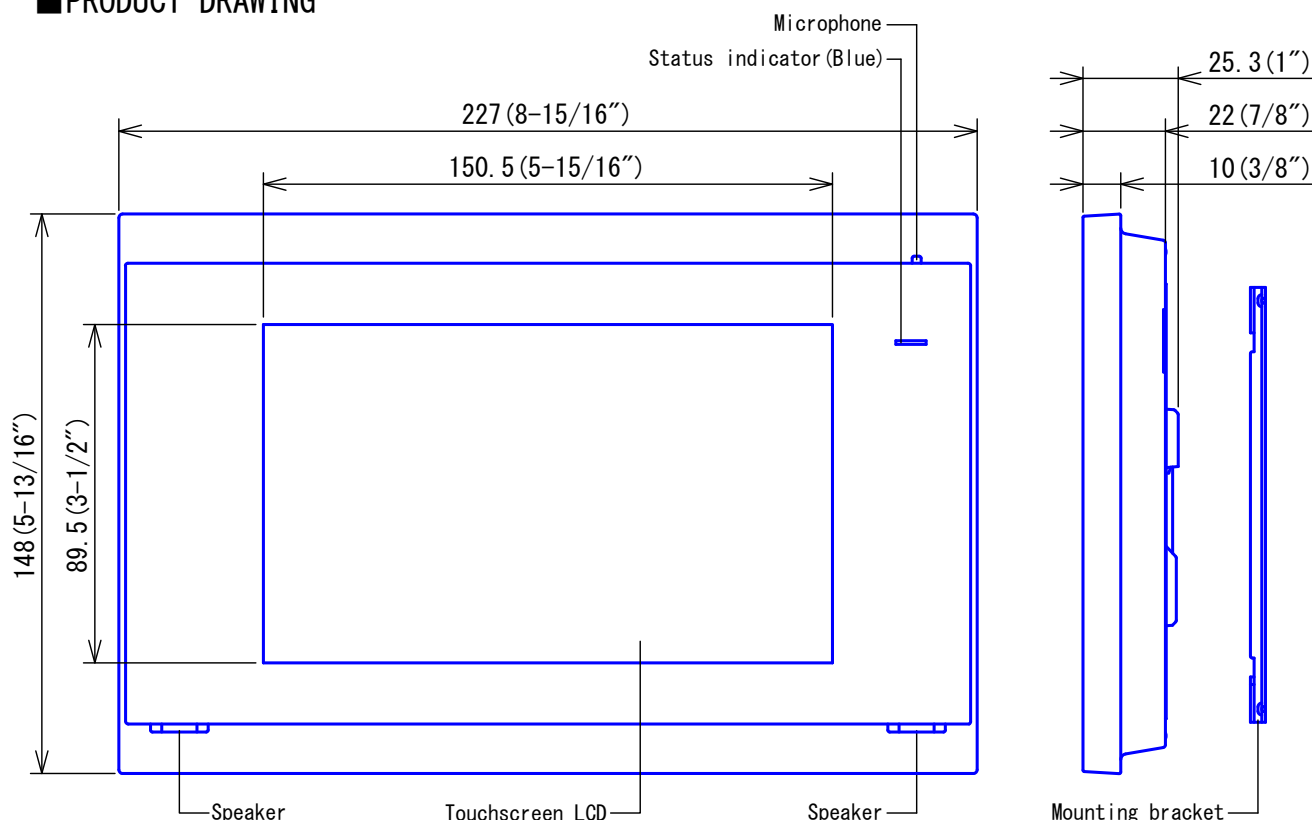

## ■ SPECIFICATIONS


Power source	Power-over-Ethernet (IEEE 802.3af Class 0)		
Current consumption	Standby 1.9W, Max. 5.9W (48V DC)		
Type of communication	Full duplex audio (depending on the destination station)		
Monitor	7 inch TFT LCD display		
Monitor resolution	WVGA 800 x 480 (Approx. 1.15 million pixels)		
LAN	Ethernet (10BASE-T, 100BASE-TX), Auto MDI/MDI-X-compatible		
Audio codec	G. 711 ( $\mu$ -law, A-law)		
Video codec	H. 264 BP/MP/HP, motion JPEG		
Protocol	IPv4, IPv6, TCP, UDP, SIP, RFC3261, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS		
Encryption method	TLS1.0, TLS1.1, TLS1.2		
Packet delivery	Unicast, Multicast		
Number of units in address book	Max. 9,999 units (IX/IXG stations: Max. 500 stations + Intercom App: Max. 9,999)		
Number of buildings	Max. 99 buildings		
Number of stations per unit	8 stations and 8 Intercom App		
Operating ambient temperature	0 - 40°C (32 - 104° F)		
Mounting	Wall-mount		
Electrical box	3-gang box		
Material	Flame resistant PC + ABS resin		
Unit color	Snow white (5Y9.3/0.1 Munsell Approximation)		
Weight	Approx. 560g (1.24 lbs)		
Remarks	ONVIF Profile S supported		
DESCRIPTION VIDEO TENANT STATION	FIG. NAME PRODUCT DRAWING/SPEC.	UNIT mm	DATE 6 April, 2022
MODEL NO. IXG-2C7	FIG. NO. 156687-1-6	PAGE 1/6	REVISION 3 <b>AIPHONE</b>

# <Back view>

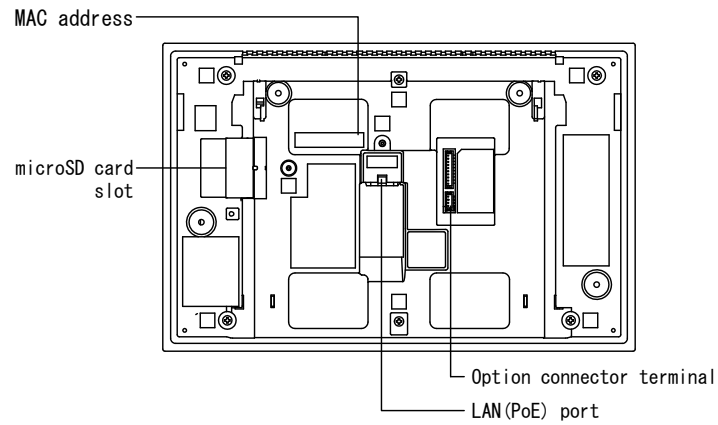


## ● MOUNTING

### ▪ Wall-mounting

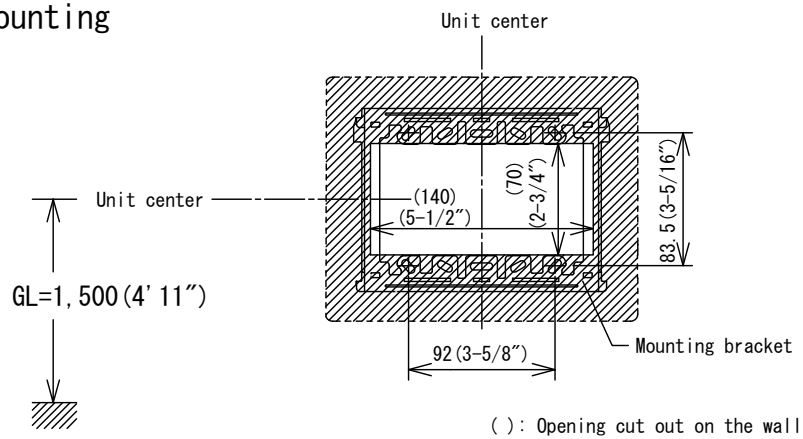

DESCRIPTION <b>VIDEO TENANT STATION</b>	FIG. NAME <b>PRODUCT DRAWING</b>	UNIT mm	DATE 12 February, 2020
MODEL NO. <b>IXG-2C7</b>	FIG. NO. 156687-2-6	PAGE 2/6	REVISION 1
<b>AIPHONE</b>			

## ■ WIRING DIAGRAM

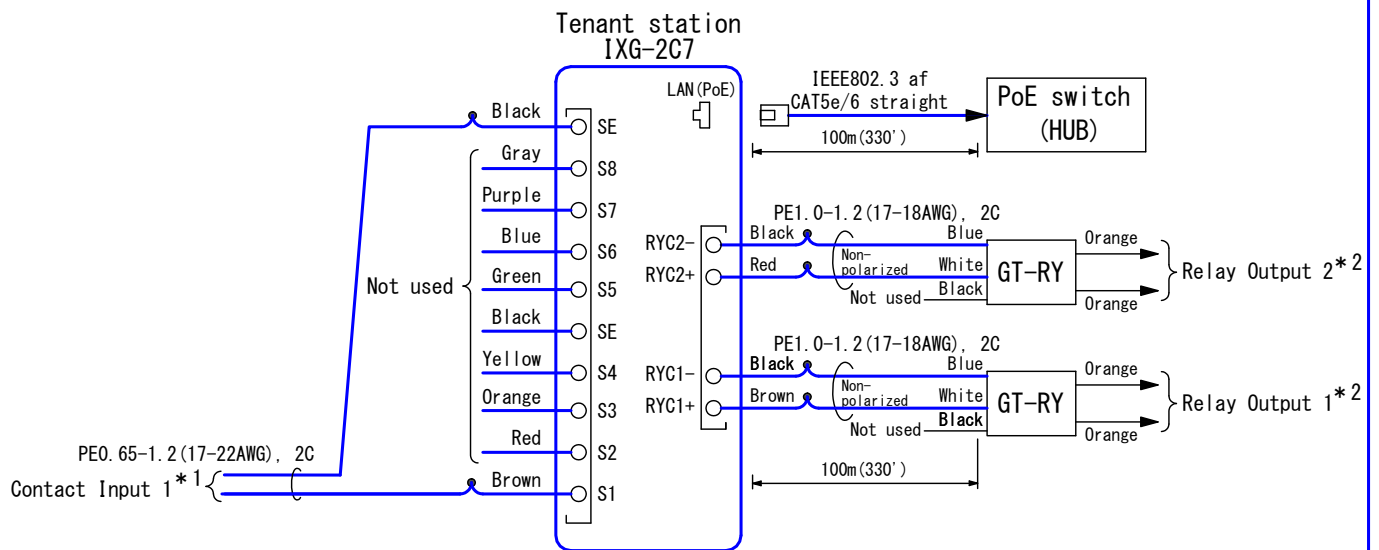

### \*1. Contact Input Specifications

Input method	Programmable dry contact (N/O or N/C)
Detection time	Level detection method
	200 msec or more
Contact resistance	Make: 700 $\Omega$ or less Break: 3 k $\Omega$ or more
Terminal short-circuit current	10 mA or less
Voltage between terminals	5.5 VDC or less (between open terminals)

### \*2. Relay Output Specifications (GT-RY)

Output method	Form A dry contact (N/O)
Contact rating	24 VAC, 0.5A (resistive load) 24 VDC, 0.5A (resistive load)

DESCRIPTION <b>VIDEO TENANT STATION</b>	FIG. NAME <b>WIRING DIAGRAM</b>	UNIT mm	DATE 12 February, 2020
MODEL NO. <b>IXG-2C7</b>	FIG. NO. 156687-3-6	PAGE 3/6	REVISION 1
<b>AIPHONE</b>			

## ■ RESTRICTIONS

- A PoE-compatible switch must be used as the switch (hub) for station connection.
- A computer is required to make system settings.  
IXG system can be configured in "IXG Support Tool" application.
- While updating the System settings, stations unavailable.
- Do not register unused units in the address list. If unused units are present in the address list, system performance will degrade.
- In order to audio or video record, the following microSD memory card (market goods) compliant with SD standard is necessary.

Standard	Supported storage capacity	Format	Speed Class
microSDHC memory card	4GB to 32GB	FAT32	SD speed class 10

## ■ RESTRICTIONS ABOUT THE NETWORK

- When connecting via the Internet (global IP networks), VPN Service is necessary.
- We do not recommend using a wireless communication such as wireless LAN as it may not operate correctly due to security issues or communication speed delays.
- For IPv4 Address with DHCP, due to the architecture of the IXG system, DHCP configuration is only recommended for network environments utilizing managed (static) IP address leasing.
- For stateless IPv6 Address, do not change the prefix of the device so that it cannot transmit Router Advertisement (RA).
- For IPv6 Address with DHCP, due to the architecture of the IXG system, DHCP configuration is only recommended for network environments utilizing managed (static) IP address leasing.  
The DUID of the device: 00030001 + MAC address
- Depending on the network environment and computer, prior arrangements and setup operations involving the network administrator might be necessary.
- Depending on the network environment, operation delays might occur.
- Depending on the network environment or other factors, audio or video dropout, delays, lower frame rates, or other loss of correct operation might occur.
- The protocols used by this system must be supported.
- The network bandwidth required by each device when communicating are as follows.  
G. 711 : 64kbps x 2(in communication), 64kbps x stations(on page)
- IPv4 and IPv6 cannot be mixed in the same system.
- When using multicasting for network-camera searches, video, or audio, use in an environment that does not reject IGMPv3 or MLDv2.

DESCRIPTION <b>VIDEO TENANT STATION</b>	FIG. NAME <b>RESTRICTIONS</b>		UNIT mm	DATE 12 February, 2020
MODEL NO. <b>IXG-2C7</b>	FIG. NO. 156687-4-6	PAGE 4/6	REVISION 1	<b>AIPHONE</b>

## ■FUNCTIONS

- Calling
  - Calling a Commercial unit: Call Master stations and Intercom App in a Commercial unit.
  - Calling a Guard unit: Call Intercom App in a Guard unit.
  - Calling a Common Inside Area: Call Master stations in a Common Inside Area.
  - Calling another station in the Residential unit: Call another Tenant station in the Residential unit.
  - Calling Intercom App in the Residential unit: Call Intercom App in the Residential unit.
- Answer and communication
  - Mute mode: During communication, the microphone can be turned off by pressing the mute button.
  - Auto answer: Answer a call from another Tenant station in the Residential unit automatically.
- Monitoring
  - Monitoring a Door station: Monitor video and audio from a Door station in the Residential unit or Common Outside Area.
  - Monitoring an Entrance station: Monitor video and audio from an Entrance station.
  - Monitoring an IP camera: View the video and audio of an IP camera.

Resolution of network cameras capable of displaying video	Resolution of network cameras capable of recording video
HD or lower (However, set to 5 fps or lower if larger than WVGA.)	QVGA, VGA, WVGA, HD

- Paging
  - Incoming a page
- Audio or video recording function
  - Automatic recording of audio and video: When receiving an incoming call, video can be recorded automatically for approximately 10 seconds. Save this record on the microSD card.
  - Manual recording of audio and video: Video and audio can be recorded manually for approximately 10 seconds. Save this record on the microSD card.
  - Audio or video playback: Play an audio or video recording saved to a microSD card on a station or a computer.
- Option Input
  - The following function can be assigned to the option input.
  - Incoming call from a doorbell: Receive an incoming call notification from a doorbell.
- Relay Output
  - The following function can be assigned to each of the two relay outputs.
  - Status output: Make a relay output in status of Incoming a call.
- Others
  - Unlock a door: Unlock an electric lock while receiving an incoming call, during communication, or while monitoring.
  - Up to each 20 incoming/outgoing call records are stored.
  - Adjust video to enhance visibility: Video can be adjusted to backlight compensation or night correction.
  - Control a lift by pressing the lift control button.
- Indicators

Name	Status	Description
Status indicator (blue)	Light	Standby (Depends on setting)
	Flashing	Firmware version upgrading
		Calling destination busy
		Booting
		Outgoing calling or monitoring
		Incoming calling
		Incoming paging
		Communication failure
		Missed call
		Door releasing *1

\*1. If the door release timeout is set to 3 seconds or less, it will flash at a 3 second interval.

DESCRIPTION <b>VIDEO TENANT STATION</b>	FIG. NAME <b>FUNCTIONS</b>	UNIT mm	DATE 2 February, 2021
MODEL NO. <b>IXG-2C7</b>	FIG. NO. 156687-5-6	PAGE 5/6	REVISION 2 <b>AIPHONE</b>

## ■ SETTING

- Using the "IXG Support Tool" application  
Install the application on a PC and use to create the setting file for all stations.  
Refer to "■ IXG SUPPORT TOOL"

## ■ IXG SUPPORT TOOL

- System requirements

OS	Windows 7 Professional(SP1), Windows 7 Enterprise(SP1), Windows 7 Ultimate(SP1) Windows 8, Windows 8 pro, Windows 8 Enterprise Windows 8.1, Windows 8.1 pro, Windows 8.1 Enterprise Windows 10 Home, Windows 10 pro, Windows 10 Enterprise
CPU	32 bit (x86) processor or 64 bit (x64) processor of 1 GHz or higher
Memory	4 GB RAM or higher
Screen resolution	1280x768 or greater

- Functions

- Settings...All stations in the system can be configured from the Settings window.
- Setting File Download...Store the Settings File
- Setting File Upload...Upload the Settings File
- Station Search...Search the stations in IX/IXG System connected in the network to show the list.
- Station Replacement...this feature to replace a station.
- Restore System Settings...If the setting file is lost, the setting file can be restored.
- Update Firmware...Update the firmware for the station.

## ■ IXG SUPERVISION TOOL

Install the application on a PC and use to Line supervision for stations.

- System requirements

OS	Windows 7 Professional(SP1), Windows 7 Enterprise(SP1), Windows 7 Ultimate(SP1) Windows 8, Windows 8 pro, Windows 8 Enterprise Windows 8.1, Windows 8.1 pro, Windows 8.1 Enterprise Windows 10 Home, Windows 10 pro, Windows 10 Enterprise
CPU	32 bit (x86) processor or 64 bit (x64) processor of 1 GHz or higher
Memory	4 GB RAM or higher
Screen resolution	1280x768 or greater

- Functions

- Line Supervision...By checking the response to a ping, this feature confirms that the station is properly connected to the network.

DESCRIPTION <b>VIDEO TENANT STATION</b>	FIG. NAME SETTING/IXG SUPPORT TOOL/ IXG SUPERVISION TOOL	UNIT mm	DATE 12 February, 2020
MODEL NO. <b>IXG-2C7</b>	FIG. NO. 156687-6-6	PAGE 6/6	REVISION 1 <b>AIPHONE</b>