


■ PRODUCT DRAWING

● License authentication USB key

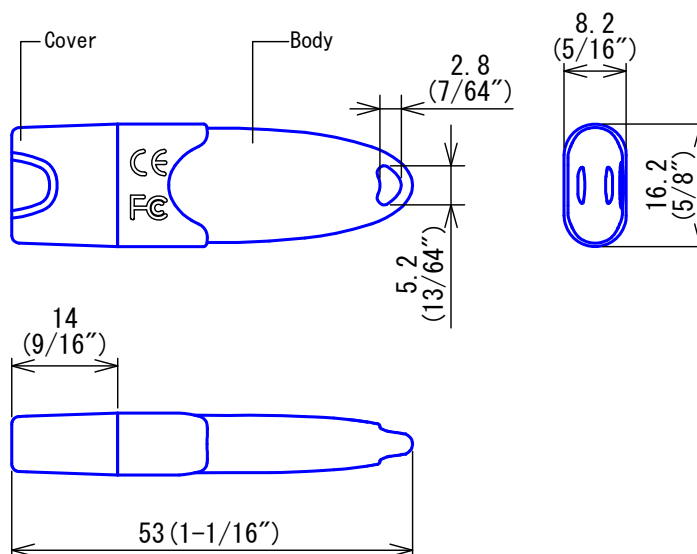

■ SPECIFICATIONS (License authentication USB key)


Current consumption	250mW or less			
USB interface	USB 1.1 / USB 2.0 / USB3.0			
Connector	A Plug			
Ambient temperature	0 - 70°C (32 - 158° F)			
Storage environment	-10 - +80°C (+14 - +176° F) , 20 - 80%			
Material	Polycarbonate			
Unit color	Blue			
Weight	Approx. 6g (0.014 lbs)			
Remarks	Used for: IX system			
DESCRIPTION INTERCOM APPLICATION FOR PC	FIG. NAME PRODUCT DRAWING/SPEC.		UNIT mm (inch)	DATE 1 July, 2020
MODEL NO. IX-SOFT	FIG. NO. 102437-1-5	PAGE 1/5	REVISION 1	AIPHONE

Describes the latest firmware specifications.

■ INTERCOM APPLICATION FOR PC

Download the application from our website.

Install it on a PC (commercially available) and use it.

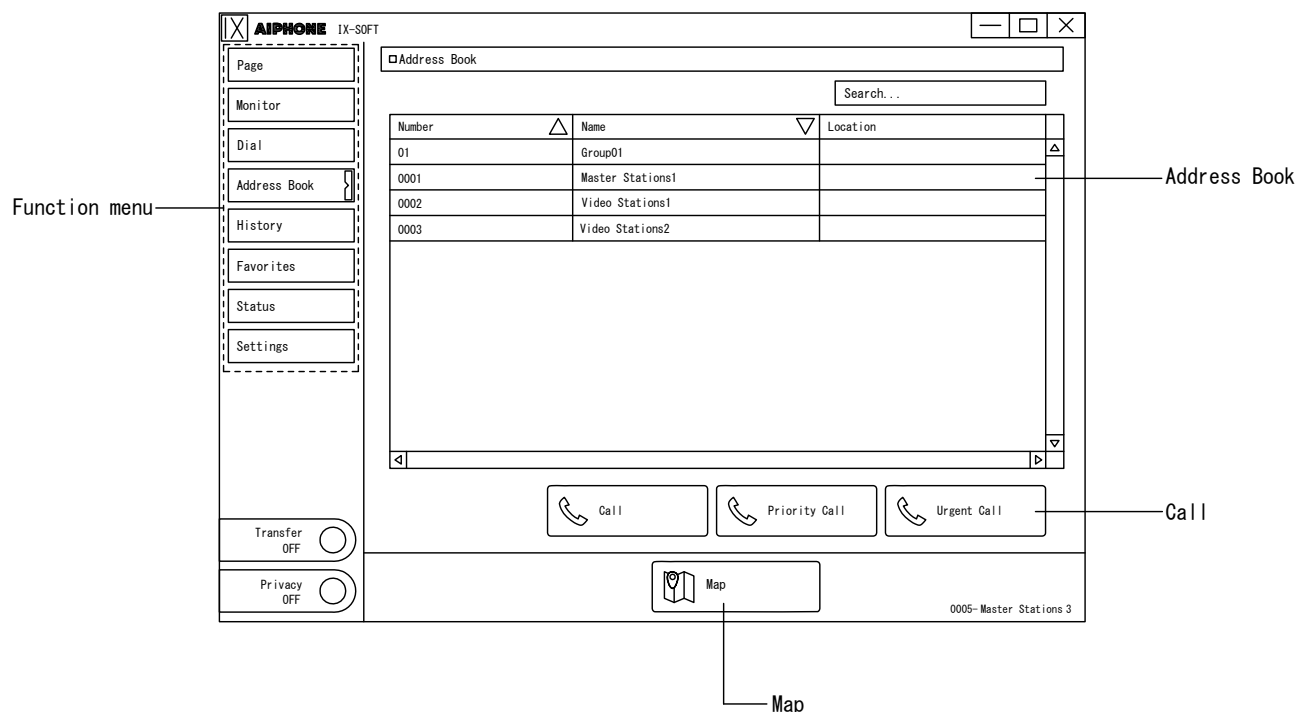

● System requirements

OS	Windows® 7 Professional, Windows® 7 Enterprise, Windows® 7 Ultimate Windows® 8.1, Windows® 8.1 pro, Windows® 8.1 Enterprise Windows® 10 Home, Windows® 10 pro, Windows® 10 Enterprise Windows® 10 Education, Windows® 11 Home, Windows® 11 pro, Windows® 11 Enterprise
CPU	32 bit (x86) processor or 64 bit (x64) processor of 2 GHz or higher (Windows® 7 is 64bit only)
Memory	1 GB or higher
Screen resolution	1024x768 or greater
Runtime	.NET Framework4.6.2 or later (Windows® 7 requires SP1) Microsoft Visual C ++ Redistributable Package for Visual Studio 2017 or later

*. When using Windows 7, the sound during the communication be interrupted.

■ SPECIFICATIONS(Intercom application for PC)

Audio codec	G. 711(μ -law, A-law), G. 722			
Video codec	H. 264/AVC, Motion-JPEG			
Protocol	IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS			
Encryption method	TLS1.2 (CRAM-MD5 for email)			
Packet delivery	Unicast, Multicast			
Number of units in address book	Max. 499 stations (Max. 9,998 stations for Expanded System)			
Remarks	ONVIF Profile S supported			
DESCRIPTION	FIG. NAME	UNIT	DATE	
INTERCOM APPLICATION FOR PC	INTERCOM APPLICATION FOR PC/SPEC.	mm	7 December, 2022	
MODEL NO.	FIG. NO.	PAGE	REVISION	AIPHONE
IX-SOFT	102437-2-5	2/5	3	

■ RESTRICTIONS

- Settings with the dedicated application "IX support Tool" are required.
- Due to handsfree auto voice actuation system, smooth voice switching may be hindered by voice strength of the opponent or ambient noise, etc.
- While updating the System settings, stations unavailable.
- Do not register unused units in the address list. If unused units are present in the address list, system performance will degrade.
- If the audio codec is G.722, the transmitted and received sound has the same sound quality as G.711 (8 kHz sample rate).
- If the application is used without the PC recognizing the inserted license authentication USB key, the application may only be used for 30 days.
- When the computer is in sleep mode, network communication may not be possible, or applications may not operate properly.
- When using a USB-LAN adapter, images may be distorted.
- When using a headset, the ringtone will ring only in the headset.

■ RESTRICTIONS ABOUT THE NETWORK

- When connecting via the Internet (global IP networks), VPN Service is necessary.
- We do not recommend using a wireless communication such as wireless LAN as it may not operate correctly due to security issues or communication speed delays.
- For IPv4 Address with DHCP, due to the architecture of the IX system, DHCP configuration is only recommended for network environments utilizing managed (static) IP address leasing.
- For stateless IPv6 Address, do not change the prefix of the device so that it cannot transmit Router Advertisement (RA).
- For IPv6 Address with DHCP, due to the architecture of the IX system, DHCP configuration is only recommended for network environments utilizing managed (static) IP address leasing.
- Depending on the network environment and computer, prior arrangements and setup operations involving the network administrator might be necessary.
- Depending on the network environment, operation delays might occur.
- Depending on the network environment or other factors, audio or video dropout, delays, lower frame rates, or other loss of correct operation might occur.
- The protocols used by this system must be supported.
- The network bandwidth required by each device when communicating are as follows.
 - G.711 - G.722: 64kbps x 2 (in communication), 64kbps x stations (on page)
 - H.264: 32kbps up to 2048kbps
- IPv4 and IPv6 cannot be mixed in the same system.
- When using multicasting for video, or audio, use in an environment that does not reject IGMPv3 or MLDv2.

DESCRIPTION INTERCOM APPLICATION FOR PC	FIG. NAME RESTRICTIONS	UNIT mm	DATE 1 July, 2020
MODEL NO. IX-SOFT	FIG. NO. 102437-3-5	PAGE 3/5	REVISION 1
AIPHONE			

■FUNCTIONS

- Calling
 - Individual Call : Call a specific station.
 - Group Call: Make an outgoing call to all stations that belong to the selected group.
 - Contact input call: Make an outgoing call to all stations that belong to the selected Contact input call group.
- Answer and communication
 - Push-to-talk: This communication mode switches between sending speech or receiving speech.
 - Mute mode: During communication, the camera and microphone can be turned off by pressing the mute button.
 - Auto answer: When auto answer is enabled, individual calls from other Master Stations or Intercom application for PC will be answered automatically.
 - Privacy: When auto answer feature is enabled, the camera and microphone of the station will not be turned on.
- Monitoring
 - Monitor a door station: Monitor video and audio from a door station.
Master Stations or Intercom application for PC cannot be monitored.
 - Monitor a network camera: Monitor video from a network camera.
 - Scan monitor: Monitor video and audio from multiple terminals or network cameras while switching over at regular time intervals.
- Audio or video recording function
 - Audio or video recording: Record audio and video to a PC storage at the start of or during a call.
 - Audio or video playback: Play an audio or video recordings.
- Transfer
 - Absent transfer/Schedule transfer/Delay transfer can be transferred to preset 10 stations. However, when transferring the transferred call again, it is transferred to one station.
 - Transfer calls (during communication): Transfer an answered call to another station.
 - Absent transfer: Activate absent transfer, the incoming calls are sent to another station automatically.
 - Schedule transfer: A call can be transferred automatically, according to a schedule.
 - Delay transfer: Incoming calls can be transferred to another station automatically when not answered within a set period of time.
- Paging
 - Paging a group: Send a page to all stations that belong to a selected group.
 - Paging all stations: Send a page to all stations that are registered on this device.
Note) Unicast can reach up to 50 stations.
 - Message paging: Distribute message data and play notification sound on receiving device.
- Speed Dials/Favorites
 - The following functions can be assigned to each of the fifty speed dials.
 - Calling: Individual Call, Group Call
 - Paging: Group page, All page, Message page
 - Monitor: Monitor a station or network camera, Scan monitor
 - Option Relay Control: Control another station's relay output.
- Map function
 - Arbitrary map image files can be imported and station icons can be placed on the map.
 - The following functions can be executed from the created map.
 - Select station
 - Calling, Paging, Monitoring, Option Relay Control
 - Indicate the status of stations (SIF setting is necessary)
- Others
 - IP-PBX integration: IX System can integrate with IP-PBX.
Make, receive, transfer calls, answer visitors, and release doors.
 - *. Some countries have local restrictions on connecting to a PBX.
Please refer to our website to check the countries where PBX connection is allowed.
<https://www.aiphone.net/support/software-documents/ix/documents.html>
 - Unlock a door: Unlock an electric lock during communication, or during monitoring.
 - Up to each 500 incoming/outgoing call records are stored. Station monitoring is not logged in call history.

DESCRIPTION	FIG. NAME	UNIT	DATE
INTERCOM APPLICATION FOR PC	FUNCTIONS	mm	24 August, 2021
MODEL NO.	FIG. NO.	PAGE	REVISION
IX-SOFT	102437-4-5	4/5	2
AIPHONE			

Adjust video to enhance visibility: The image will be adjusted to back light compensation and night time correction.

Send emails: Emails can be sent to pre-registered email addresses when triggering events occur.

Picture-by-picture function: Display images from two cameras simultaneously during calling, monitoring, or other function.

Supervision: Perform line supervision or device check.

■ SETTING

- Station settings
Configure on the station
- Using the "IX Support Tool" application
Install the application on a PC and use to create the setting file for all stations.
Refer to "■ IX SUPPORT TOOL"

■ IX SUPPORT TOOL

- System requirements

OS	Windows® 7 Professional, Windows® 7 Enterprise, Windows® 7 Ultimate Windows® 8, Windows® 8 pro, Windows® 8 Enterprise Windows® 8.1, Windows® 8.1 pro, Windows® 8.1 Enterprise Windows® 10 Home, Windows® 10 pro, Windows® 10 Enterprise Windows® 10 Education, Windows® 11 Home, Windows® 11 pro, Windows® 11 Enterprise
CPU	32 bit (x86) processor or 64 bit (x64) processor of 1 GHz or higher
Memory	4 GB RAM or higher
Screen resolution	1280x768 or greater

- Functions
 - Settings(Table View)---All stations in the system can be configured from the Settings window.
 - Settings(Station View)---Configure each station in the system individually.
 - Setting File Download---Store the Settings File
 - Setting File Upload---Upload the Settings File
 - Station Search---Search the stations in IX System connected in the network to show the list.
 - Station Replacement---this feature to replace a station.
 - Restore System Settings---If the setting file is lost, the setting file can be restored.
 - Update Firmware---Update the firmware for the station.
- Restrictions
 - If the station was configured or modified using the web interface, the setting file cannot be downloaded using the IX Support Tool.

■ IX SUPERVISION TOOL

Install the application on a PC and use to Line supervision and device check for stations.

- System requirements

OS	Windows® 7 Professional, Windows® 7 Enterprise, Windows® 7 Ultimate Windows® 8, Windows® 8 pro, Windows® 8 Enterprise Windows® 8.1, Windows® 8.1 pro, Windows® 8.1 Enterprise Windows® 10 Home, Windows® 10 pro, Windows® 10 Enterprise Windows® 10 Education, Windows® 11 Home, Windows® 11 pro, Windows® 11 Enterprise
CPU	32 bit (x86) processor or 64 bit (x64) processor of 1 GHz or higher
Memory	4 GB RAM or higher
Screen resolution	1280x768 or greater

- Functions
 - Line Supervision---By checking the response to a ping, this feature confirms that the station is properly connected to the network.
 - Device Check---This function to determine whether stations are operating normally or malfunctioning.
 - Download Video and Audio---To download recordings of the Station's micro SD card.

DESCRIPTION INTERCOM APPLICATION FOR PC	FIG. NAME FUNCTIONS/ SETTING/ IX SUPPORT TOOL/ IX SUPERVISION TOOL	UNIT mm	DATE 7 December, 2022
MODEL NO. IX-SOFT	FIG. NO. 102437-5-5	PAGE 5/5	REVISION 3 AIPHONE