

Product Name

R2

(External driver)

Technical description

This fitting is suitable for wall or ceiling application. R1 is equipped with the latest LED technology that, combined with the choice of different optics, it ensures high performance lighting in the name of energy sustainability. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block in die-cast aluminum and powder painted. Stainless steel screws AISI 304. Silicone gaskets. On request, tempered glass sodium-calcium type, 5 mm thickness, 91% transparency. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (available in dimmable or DALI versions).
Voltage 220-240V AC 50/60Hz.
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Commercial areas, Industrial areas, Sport facilities, Assembling areas

Size (mm)

562 x 231 x 119

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L80B20



IP66



IK08



RG0
IEC 62471



U.V.



MAX

8,9 Kg

Flicker Free





LED



RoHS



05

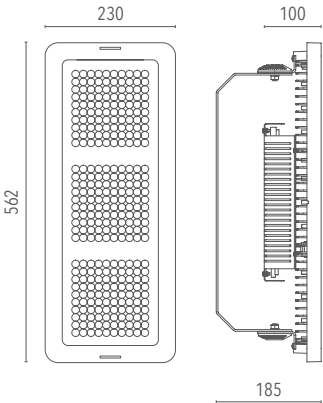

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00R240A1BL40300	LED	300 W	37792 lm	50400 lm	4000 K	>80	ASIM 45°	Dark grey	-
L00R240A1DI40300	LED	300 W	37792 lm	50400 lm	4000 K	>80	ASIM 45°	Dark grey	Dimmer
L00R240A1DA40300	LED	300 W	37792 lm	50400 lm	4000 K	>80	ASIM 45°	Dark grey	DALI

Accessories



Suspension Kit
LKITA00000000004



Fast connector
IP 2 poles
LKITA00000000017



Fast connector
IP 3 poles
LKITA00000000003




Fast connector
IP 5 poles
LKITA00000000103



Cable with connector
Ca. 2 m., Con 2 poles
LKITA00000000040
Ca. 2 m., Con 3 poles
LKITA00000000041



90° Bracket kit
LKITA00000000020



Grid kit
IK10 protection
LKITA00000000037

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.