

## Product Name

# Qs

(Linear)

## Technical description

Adjustable floodlight suitable for wall or ceiling application, designed to produce direct or indirect light. It has a low visual impact. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with a painted galvanised steel bracket. Screws made of 18/10 stainless steel. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic optical PC.

## Supply

Driver included linear.  
Input voltage 230 V AC 50Hz.  
Temperature -40° +45°

## Installation

Wall and ceiling.

## Applications

Big boards, facades decoration, shop windows.

## Size (mm)




155 x 171 x 32

## Colour

Dark grey **4**

## Decay of the luminous flux

≤50.000 hr L80B20

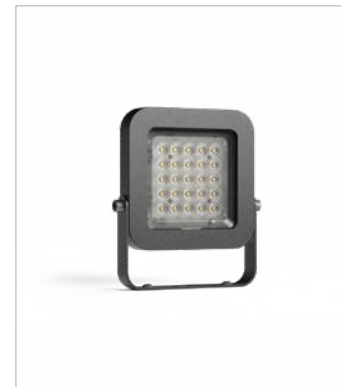

C0 / C180 C90 / C270



IP66



0,7 Kg

Low Flicker



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour
<b>L00QS4060LI40010</b>	LED	10 W	979 lm	1570 lm	4000 K	>80	60°	Dark grey

## Accessories



Pole connection B  
Max 4 x Qs  
LKITA00000040002



Fast connector  
IP 3 poles  
LKITA00000000003

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.