

## Product Name

**Qm**  
(Linear)

## Technical description

Adjustable floodlight suitable for wall or ceiling application, designed to produce direct or indirect light. It has a low visual impact. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with a painted galvanised steel bracket. Screws made of AISI 304 stainless steel. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic optical PC.

## Supply

Driver included linear  
Input voltage 230 V AC 50Hz.  
Temperature -40° +45°

## Installation

Wall and ceiling

## Applications

Churches, museums, shop windows, facades decoration

## Size (mm)




211 x 233 x 37

## Colour

Dark grey **4**

## Decay of the luminous flux

≤50.000 hr L80B20

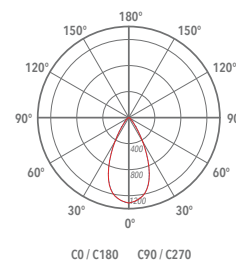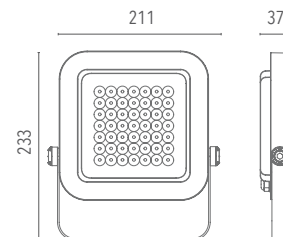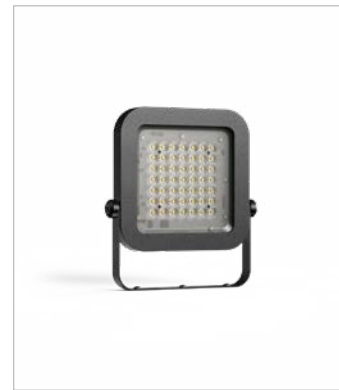

IP66

IK08



1,2 Kg

Low Flicker



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
<b>L00QM4060LI40030</b>	LED	30 W	3025 lm	4710 lm	4000 K	>80	60°	Dark grey	

## Accessories



Pole connection B  
Max 2 x Qm  
LKITA00000040002



Fast connector  
IP 3 poles  
LKITA00000000003

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.