

## Product Name

Q

(External driver)

## Technical description

Essential and clean design for a floodlight which becomes the main protagonist of the space through a confident style. Supplied with bracket and goniometer, Q can be oriented in multiple directions, thus creating lighting directions always different, both for wall (standard bracket) and ceiling application (optional bracket). UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block in die-cast aluminum and powder painted. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness. 91% transparency is guaranteed. Silicone gaskets.

LED light source (lumileds), colour temperature (4000 K Neutral White).

High coefficient of performance chromatic CRI>80. Optic optical PC.

## Supply

External driver (also in versions dimmable or DALI)

Input voltage 220 - 240V AC 50/60Hz.

Temperature -40° +45°

## Installation

Wall and ceiling

## Applications




Facades decoration, Commercial areas, Parking, Fair exhibitions, Advertising installations

## Size (mm)

220 x 270 x 96

## Colour

Dark grey **4**

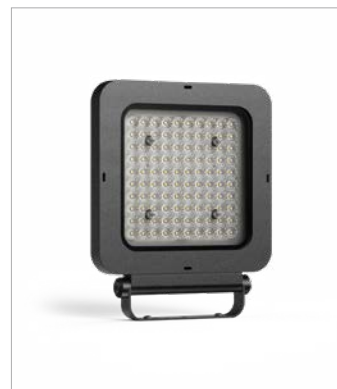

| Code                    | Source | Power | Lm (Output) | Lm (Tc=25°) | Temperature | CRI | Beams | Colour    | Control |
|-------------------------|--------|-------|-------------|-------------|-------------|-----|-------|-----------|---------|
| <b>L000Q4015BL40085</b> | LED    | 85 W  | 12003 lm    | 14280 lm    | 4000 K      | >80 | 15°   | Dark grey | -       |
| <b>L000Q4015DI40085</b> | LED    | 85 W  | 12003 lm    | 14280 lm    | 4000 K      | >80 | 15°   | Dark grey | Dimmer  |
| <b>L000Q4015DA40085</b> | LED    | 85 W  | 12003 lm    | 14280 lm    | 4000 K      | >80 | 15°   | Dark grey | DALI    |

## Accessories



Pole connection A  
Max 4 x Q  
LKITA00000040001



Fast connector  
IP 2 poles  
LKITA00000000017



Fast connector  
IP 3 poles  
LKITA00000000003



Ceiling Kit  
LKITA00000000060  
Galvanised iron  
LKITA00000000061  
Inox



Cable with connector  
Ca. 2 m., Con 2 poles  
LKITA00000000040  
Ca. 2 m., Con 3 poles  
LKITA00000000041



Pole mounting  
bracket  
LKITA00000000002

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of  $\pm 10\%$  respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.