

## **DECLARATION OF PERFORMANCE**

# According to Construction Products Regulation EU N° 305/2011 N° 0832-CPR-F0565/14

Product Name:	CHQ-BSB2/RL, CHQ-BSB2(WHT)/RL & CHQ-BSB2(WHT)/RL-HFP
Intended use:	Intelligent analogue addressable loop powered type A base sounder beacon for use in fire detection and alarm systems for buildings.
Manufactured by :	Hochiki Europe (UK) Ltd, Grosvenor Road, Gillingham, Kent, ME8 0SA
Authorised representative:	N/A
System of Assessment:	System 1
Assessed by:	BRE Global Limited (Notified Body 0832) has performed type testing of the product, initial inspection of the manufacturing plant and of factory production control with continuous surveillance, assessment and evaluation of factory production control under system 1 and issued following certificate of conformity: 0832-CPR-F0565
Declared performance:	All requirements including all essential characteristics <sup>(1)</sup> and corresponding performances <sup>(2)</sup> as described in the harmonised standards: EN54-3:2001 Fire detection and fire alarm systems - Part 3: Fire alarm devices - Sounders EN54-23:2010 Fire detection and fire alarm systems - Part 23: Fire Alarm Devices - Visual alarm devices
	for the intended uses indicated above have been determined. <sup>(1)</sup> See Annex A for the Essential Characteristics details <sup>(2)</sup> See Annex B for additional performance details

The performance of the above mentioned products are in conformity with the performance and essential characteristics declared within this certificate. This declaration of performance is issued under the sole responsibility of Hochiki Europe (UK) Ltd.

Page 1 of 5

Signed for and on behalf of the manufacturer by:

Date of issue 22nd April 2015

Ray Turner General Manager of Operations

HOCHIKI EUROPE (UK) LIMITED Grosvenor Road, Gillingham Business Park, Gillingham, Kent, ME8 0SA, United Kingdom Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132 e-mail (UK Sales): sales@hochikieurope.com e-mail (Non UK Sales): export@hochikieurope.com www.hochikieurope.com

Reg. Address: 11 Raven Wharl, Lafone Street, Butlers Wharf, London SE1 2LR Registered in England no. 2639909 VAT no. GB 573 8188 03











### Annex A - Essential Characteristics

Essential characteristics	EN54-3:2001 +A1:2002 + A2:2006	Performance
Performance under fire conditions	4.2, 4.3, 5.2, 5.3	Pass
Operational reliability	4.4, 4.5, 4.6, 5.4	Pass
Durability of operational reliability: Temperature resistance	5.5, 5.6 <sup>a</sup> , 5.7, 5.8, 5.9	Pass
Durability of operational reliability: humidity resistance	5.8, 5.9, 5.10 <sup>a</sup>	Pass
Durability of operational reliability: corrosion resistance	5.11	Pass
Durability of operational reliability: shock and vibration resistance	5.12 to 5.15	Pass
Durability of operational reliability: electrical stability	5.16	Pass
Durability of operational reliability: resistance to ingress	5.17	Pass

a outdoor devices only

HOCHIKI EUROPE (UK) LIMITED Grosvenor Road, Gillingham Business Park, Gillingham, Kent, ME8 0SA, United Kingdom Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132 e-mail (UK Sales): sales@hochikieurope.com e-mail (Non UK Sales): export@hochikleurope.com www.hochikieurope.com

Reg. Address: 11 Raven Wharl, Lafone Street, Butlers Wharf, London SE1 2LR Registered in England no. 2639909 VAT no. GB 573 6168 03







Page 2 of 5



Annex A - Essential Characteristics cont.

Product: Fire detection and fire alarm systems - Alarm devi	ices – Visual alarm devices (V.	ADs)		
Intended use: Fire detection and fire alarm systems installed in and around buildings				
Essential characteristics	Requirement clauses in this and other European Standard(s)	Level(s) or class(es)	Notes	
Operational reliability:				
Duration of operation	4.2.1	N/A	Pass	
Provision for external conductors	4.2.2	N/A	Pass	
Flammability of materials	4.2.3	N/A	Pass	
Enclosure protection	4.2.4	N/A	Pass	
Access	4.2.5	N/A	Pass	
Manufacturer's adjustments	4.2.6	N/A	Pass	
On-site adjustment of behaviour	4.2.7	N/A	Pass	
Requirements for software controlled devices	4.2.8	N/A	Pass	
Performance parameters under fire condition:				
Coverage volume	4.3.1	N/A	Pass	
Variation of light output	4.3.2	N/A	Pass	
Minimum and maximum light intensity	4.3.3	N/A	Pass	
Light colour	4.3.4	N/A	Red	
Light temporal pattern and frequency of flashing	4.3.5	N/A	Pass/Hz <sup>(3)</sup>	
Marking and data	4.3.6	N/A	Pass	
Synchronization (option with requirements)	4.3.7	N/A	Pass	
Durability:				
Temperature resistance:				
Dry heat (operational)	4.4.1.1	N/A	Pass	
Dry heat (endurance)	4.4.1.2	N/A	Pass	
Cold (operational)	4.4.1.3	N/A	Pass	
Humidity resistance:				
Damp heat, cyclic (operational)	4.4.2.1	N/A	Pass	
Damp heat, steady state (endurance)	4.4.2.2	N/A	Pass	
Damp heat, cyclic (endurance)	4.4.2.3	N/A	Pass	
Shock and vibration resistance:				
Shock (operational)	4.4.3.1	N/A	Pass	
Impact (operational)	4.4.3.2	N/A	Pass	
Vibration (operational)	4.4.3.3	N/A	Pass	
Vibration (endurance)	4.4.3.4	N/A	Pass	
Corrosion resistance:				
SO2 corrosion (endurance)	4.4.4	N/A	Pass	
Electrical stability:				
EMC, immunity (operational)	4.4.5	N/A	Pass	

<sup>(3)</sup> See Annex B – Additional Performance Details

HOCHIKI EUROPE (UK) LIMITED Grosvenor Road, Gillingham Business Park, Gillingham, Kent, ME8 0SA, United Kingdom Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132 e-mail (UK Sales): sales@hochikieurope.com e-mail (Non UK Sales): export@hochikleurope.com www.hochikieurope.com

Reg. Address: 11 Raven Wharl, Lafone Street, Butlers Wharf, London SE1 2LR Registered in England no. 2639909 VAT no. GB 573 8188 03





Page 3 of 5







### Annex B - Additional Performance Details

Approved tones:

27 – 660 Hz : 6500 ms / Off : 13000 ms		
28 – 660 Hz Continuous		
29 – 554 Hz : 500 ms / 440 Hz : 500 ms		
30 – 660 Hz : 500 ms / Off : 500 ms		
31 – 2850 Hz : 150 ms / Off : 100 ms		
32 – Sweep 2400 Hz – 2850 Hz over 20 ms (50 Hz)		
33 – Sweep 800 Hz – 970 Hz over 500 ms (2 Hz)		
34 – 988 Hz : 250 ms / 645 Hz : 250 ms		
35 – 510 Hz : 250 ms / 610 Hz : 250 ms		
36 – Sweep 800 Hz – 970 Hz over 110 ms (9 Hz)		
37 – Sweep 800 Hz – 970 Hz over 330 ms (3 Hz)		
38 – 845 Hz Continuous		
39 – 970 Hz : 1000 ms / Off : 1000 ms		
40 – 800 Hz : 150 ms / 970 Hz : 150 ms		
41 – Sweep 2400 Hz – 2850 Hz over 110 ms (9 Hz)		
42 – Sweep 2400 Hz – 2850 Hz over 330 ms (3 Hz)		
43 – 2850 Hz : 1000 ms / Off : 1000 ms		
44 – 2400 Hz : 150 ms / 2850 Hz : 150 ms		
45 – (German) Whoop 1200 Hz – 500 Hz : 1000 ms / Off : 10 ms		
46 – 440 Hz : 600 ms / Off : 600 ms		
47 – Whoop 500 Hz – 1200 Hz : 3750 ms / Off : 250 ms		
48 – ISO8201 : 925 Hz, 628 Hz : 250 ms / Off : 500 ms		
49 – ISO8201 : Sweep 300 Hz – 1200 Hz : 500 ms / Off : 500 ms		
50 – ISO8201 : Sweep 1200 Hz – 300 Hz : 500 ms / Off : 500 ms		
51 – Whoop 500-1200 3500 ms /Off 500 ms		

HOCHIKI EUROPE (UK) LIMITED Grosvenor Road, Gillingham Business Park, Gillingham, Kent, ME8 0SA, United Kingdom Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132 e-mail (UK Sales): sales@hochikieurope.com e-mail (Non UK Sales): export@hochikleurope.com www.hochikieurope.com

Reg. Address: 11 Raven Wharl, Lafone Street, Butlers Wharf, London SE1 2LR Registered in England no. 2639909 VAT no. GB 573 6168 03

Page 4 of 5








### Annex B - Additional Performance Details cont.

### Approved Light Volume Coverage

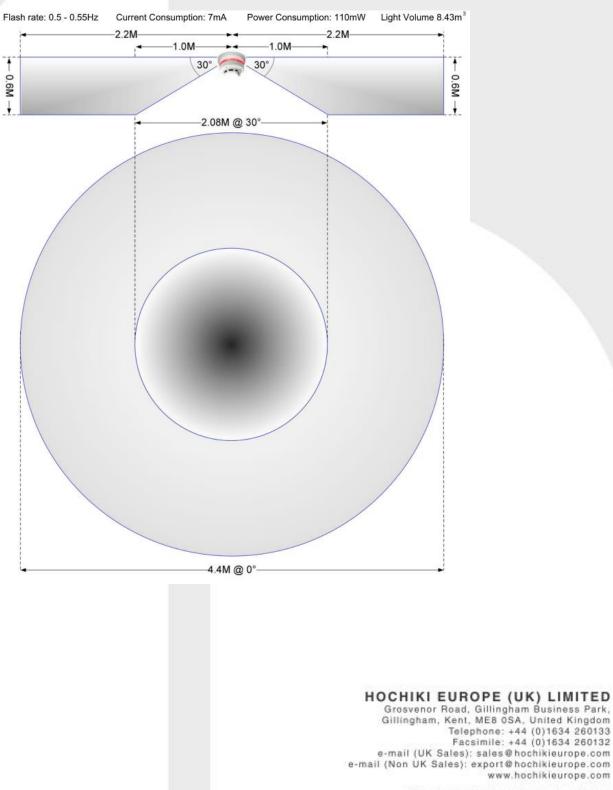

Reg. Address: 11 Raven Wharl, Lafone Street, Butlers Wharf, London SE1 2LR Registered in England no. 2639909 VAT no. GB 573 8188 03

Page 5 of 5



