George Risk Industries

(800) 523-1227

Home Products About GRI Contact GRI Where to Buy Testimonials What's New!

20F Series 3/8" Flanged Recessed Switch Sets




20F-12 Recessed Switch Set




20 OF-12 Recessed Switch Set

- Lifetime Warranty
- Colors: White, Brown, Gray or Black
- UL and ULC Approved
- Available in Closed Loop, Open Loop, SPDT and DPDT
- Standard 12" Leads
- Longer Leads, Zip Cord or Jacketed Cable on Request
- Built-in E.O.L. Resistors and Diodes Available on Request
- Switches or Magnets are Available Separately
- Round or Oval Flange Available
- Standard Gap 1/2"+
- Wide Gap 1"+
- Extra Wide Gap 1 1/2"+
- Supervisory Loops Available

The 20F and 20 OF Series are a flush mount design that enable the installer to combine the security of a screw mount flanged switch with the concealment of a press fit switch. They have been used in hollow aluminum frames where inadequate material depth will not reliably retain a press fit switch and in holes that have been drilled or have somehow become slightly oversized. They are available in 1/2" to 1 1/2" gap. Mounting hardware is provided.

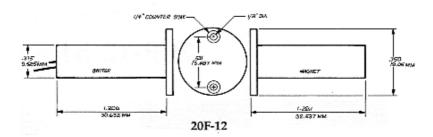

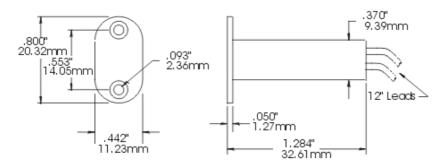

20 OF-12 Recessed Switch Set

RECESSED 3/8" FLANGED SWITCH SET



20F/20 OF SERIES (1) (1)

- ◆ Recessed Magnetic Contact
- ◆ Round or Oval Screw Down Flange ◆ 12" Leads #22AWG Leads
 - ◆ Longer Leads, Zip Cord or Jacketed Cable Upon Request
- ◆ Hermetically Sealed ◆ Plated Contacts Resist Sticking or Freezing
 - ◆ Mounting Hardware Included
 - ◆ Built-in E.O.L. Resistors and Diodes Upon Request
 - Switches and Magnets Available Separately
 - ◆ Colors: White, Brown, Gray, Black
 - ◆ Lifetime Warranty



20F-12



20OF-12

45F-12 45 OF-12
45 OF-12
45F-12WG
45 OF-12WG
45F-12XWG 45 OF-12XWG

GEORGE RISK INDUSTRIES, INC. G.R.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561


E-MAIL: sales@grisk.com WEB SITE: www.grisk.com



RECESSED 3/8" FLANGED SWITCH SET

INSTALLATION APPLICATIONS:

The 20F and 20 OF series are a flush mount design that enable the installer to combine the security of a screw mount flanged switch with the concealment of a press fit switch. They have been used in hollow aluminum frames where inadequate material depth will not reliably retain a press fit switch and in holes that have been drilled or have somehow become slightly oversized. They are available in 1/2 inch to 1 1/2 inch gap and mounting hardware is provided.

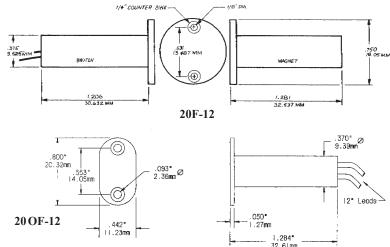

GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE	MAXIMUM CONTACT RATING	MAXIMUM SWITCHING VOLTAGE	MAXIMUM SWITCHING CURRENT
				(Ω)	(W)	(VDC)	(A)
20F-12	Closed	N/O	А	.150	10	200	.500
20F-12WG	Closed	N/O	А	.150	10	200	.500
20F-12XWG	Closed	N/O	А	.150	10	200	.500
20 OF-12	Closed	N/O	А	.150	10	200	.500
20 OF-12WG	Closed	N/O	А	.150	10	200	.500
20 OF-12XWG	Closed	N/O	А	.150	10	200	.500
30F-12	Open	N/C	В	.140	5	175VDC	.250
30F-12WG	Open	N/C	В	.140	5	175VDC	.250
30F-12XWG	Open	N/C	В	.140	5	175VDC	.250
30 OF-12	Open	N/C	В	.140	5	175VDC	.250
30 OF-12WG	Open	N/C	В	.140	5	175VDC	.250
30 OF-12XWG	Open	N/C	В	.140	5	175VDC	.250
40F-12	Open/Closed	SPDT	С	.140	5	175VDC	.250
40F-12WG	Open/Closed	SPDT	С	.140	5	175VDC	.250
40F-12XWG	Open/Closed	SPDT	С	.140	5	175VDC	.250
40 OF-12	Open/Closed	SPDT	С	.140	5	175VDC	.250
40 OF-12WG	Open/Closed	SPDT	С	.140	5	175VDC	.250
40 OF-12XWG	Open/Closed	SPDT	С	.140	5	175VDC	.250
45F-12	Open/Closed	DPDT	Cx2	.140	5	175VDC	.250
45F-12WG	Open/Closed	DPDT	Cx2	.140	5	175VDC	.250
45 OF-12	Open/Closed	DPDT	Cx2	.140	5	175VDC	.250
45 OF-12WG	Open/Closed	DPDT	Cx2	.140	5	175VDC	.250
45 OF-12XWG	Open/Closed	DPDT	Cx2	.140	5	175VDC	.250

WARRANTY:

Lifetime warranty against workmanship, material and factory defects.

CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGE RISK INDUSTRIES, INC. G.R.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: sales@grisk.com WEB SITE: www.grisk.com

BA-65 Rev. I 10/07/2013