


PRODUCT DRAWING


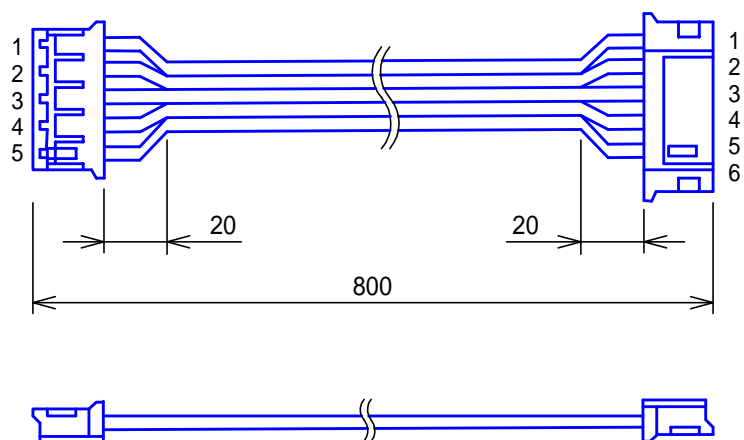


MOUNTING

It is required that GH Modules are wired in a daisy-chained manner.
GF-C connector is basically used to connect between Modules of different rows of Panels.

When making a Direct-select GH Entrance station with multiple rows of Call switch Modules GH-SW, install GF-C to connect the Modules between the farthest rows of Panels.

Examples

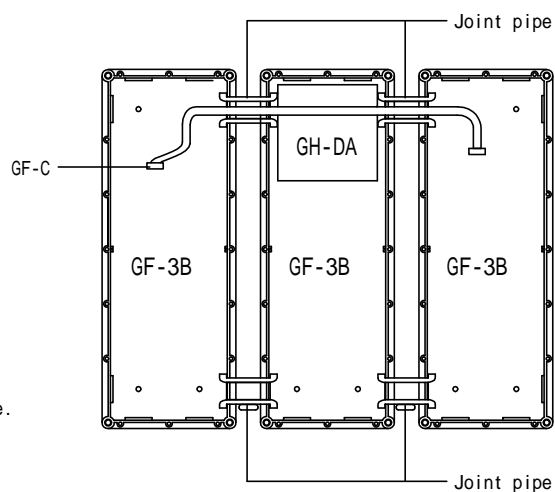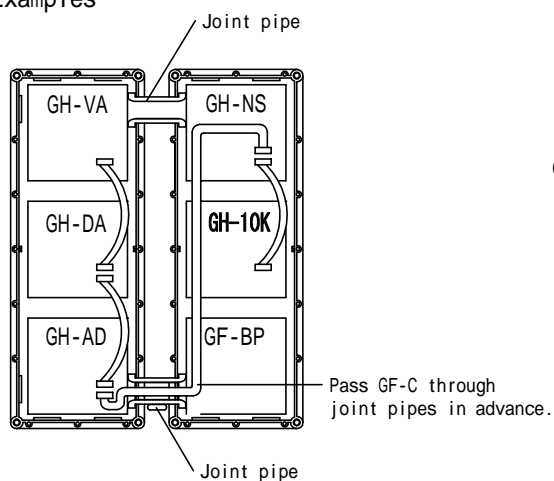

SPECIFICATIONS

Remarks	Used for Entrance station internal module-to-module wiring (Ultimate GH)			
DESCRIPTION 80CM LONG CONNECTOR	FIG. NAME PRODUCT DRAWING/SPEC.	UNIT mm	DATE 10 February, 2006	
MODEL NO. GF-C	FIG.NO. 52380311-1-1	PAGE 1/1	REVISION 2	AIPHONE