



PRODUCT DRAWING

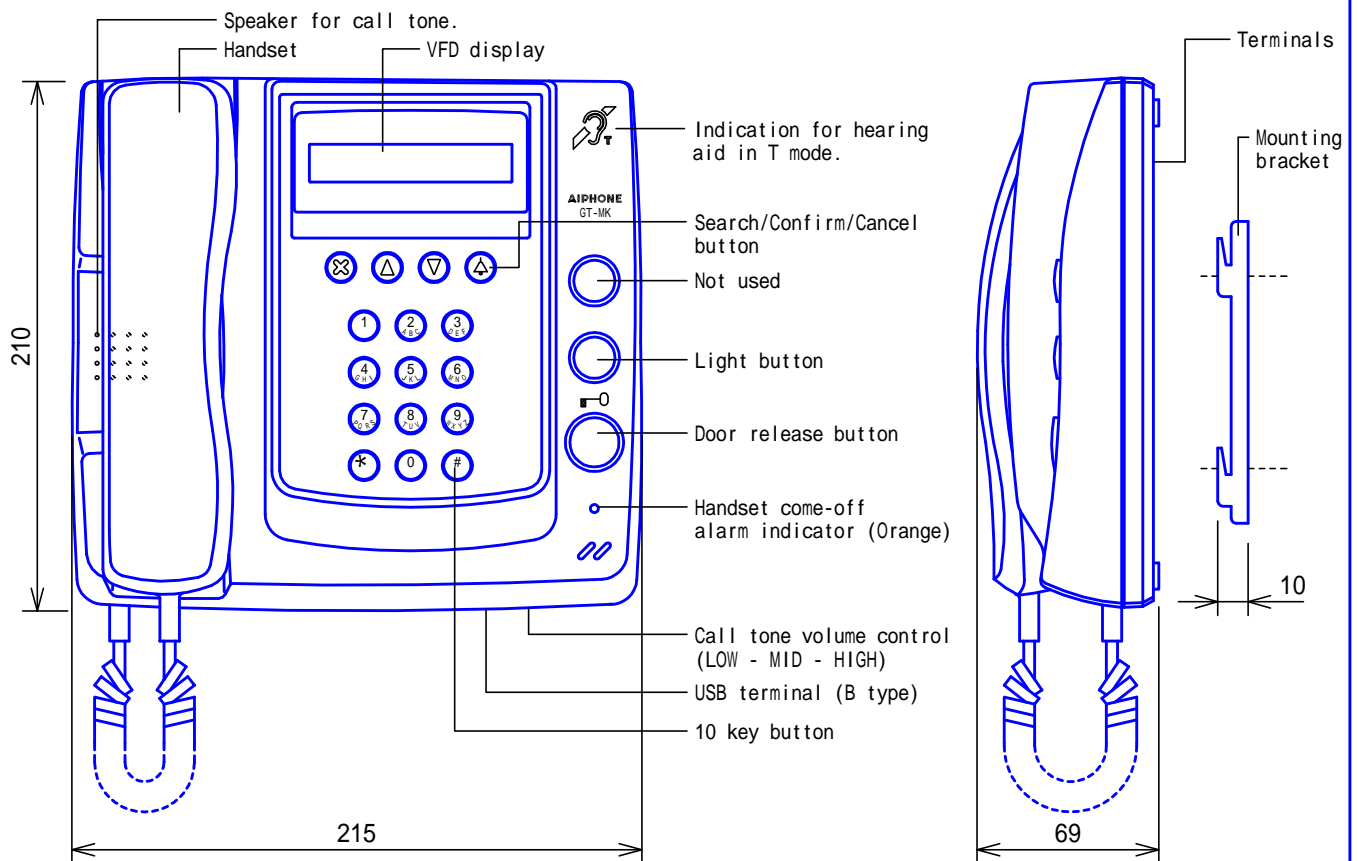


MOUNTING

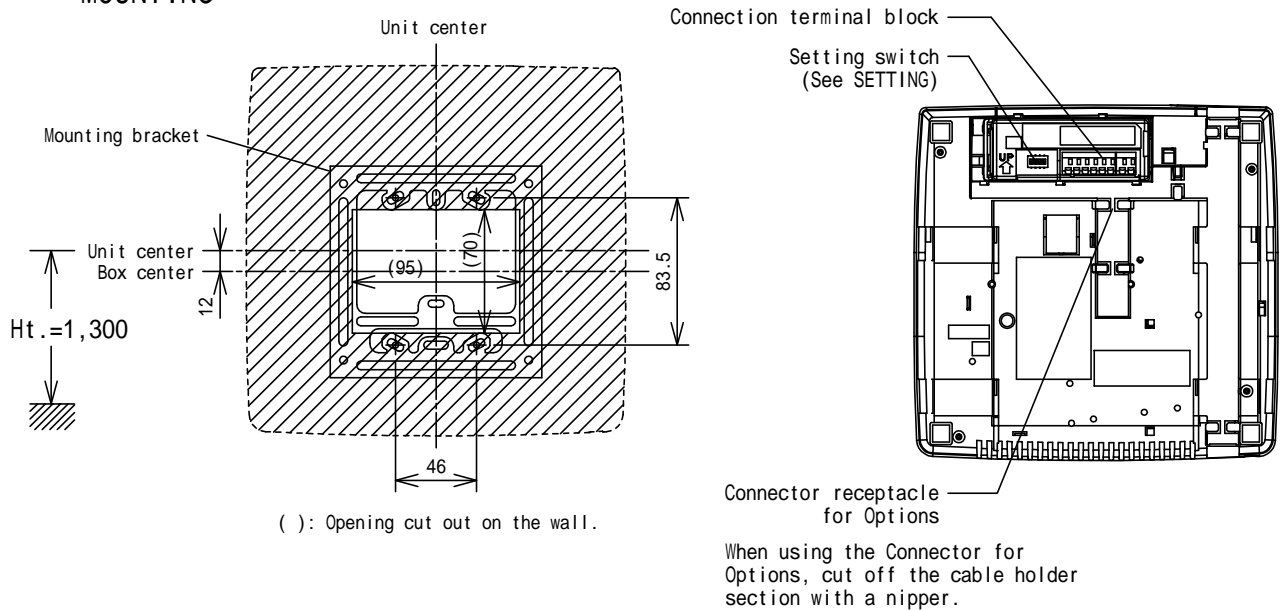

DESCRIPTION CONCIERGE STATION	FIG. NAME PRODUCT DRAWING	UNIT mm	DATE 11 March, 2011
MODEL NO. GT-MK	FIG.NO. G57415-1-3	PAGE 1/3	REVISION 1
AIPHONE			

WIRING DIAGRAM

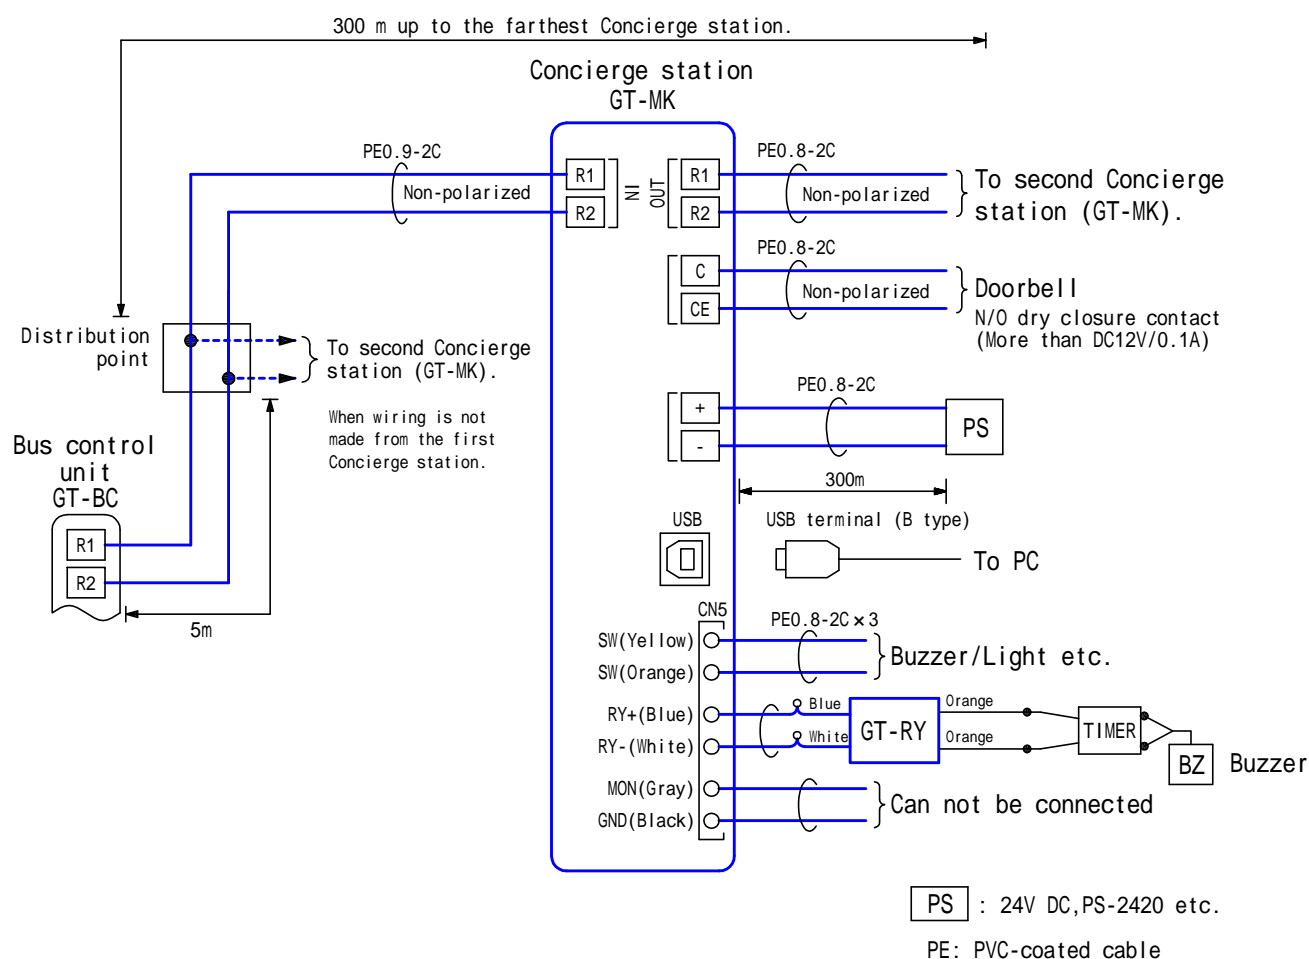

RESTRICTIONS


For the standard system, max. 2 units can be connected. (For expanded system, max. 4 units.)
Link setting for Residential station/Concierge station in the system is required.

FUNCTIONS

Receiving a call from Residential station
Receiving a call from Entrance station
Activating door release with Door release button
Calling and communication with another Concierge station, both ways
Call prohibit function (Call to residence is prohibited.)
Room number order search function
Function of one touch transfer of camera image at Entrance station
Missed call memory (Max. 20); Call back function
Emergency call from Residential station (Max. 20)
Receiving a tone call from Doorbell at the door
Setting for RECEPTION MODE [for answering all later calls from Entrances to Residential stations.]

DESCRIPTION	FIG. NAME	UNIT	DATE
CONCIERGE STATION	WIRING/RESTRIC./FUNC.	mm	11 March, 2011
MODEL NO.	FIG.NO.	PAGE	REVISION
GT-MK	G57415-2-3	2/3	1

AIPHONE



SETTING

Adjusting call tone volume (LOW - MID - HIGH)	Call tone volume switch
Concierge number reset (OFF/ON)	SW1-1
Entrance station monitor setting (Entrance monitor: Yes/No)	SW1-2
Call prohibit setting (OFF (call enabled)/ON (call prohibited))	SW1-3
Concierge station ID (OFF (#1)/ON(#2)).....	SW1-4

<Menu Screen Setting>

Output setting for call and emergency transfer (Transfer /No transfer)
 Selection of language (English/French/German/Spanish/Dutch/Italian)
 ID code (「*」 + 4 digits)
 Operation timer (15 sec. to 99 sec.)
 Program timer (30 sec. to 99 sec.)
 Call duration (30 sec. to 99 sec.)
 Scroll speed (0 (slow) to 9 (fast))
 Sort setting (Name order/Room number order)
 Residents information write

SPECIFICATIONS

Power source	DC 24V. (Supplied from power supply.)		
Current consumption	0.1A		
Type of communication	Simultaneous with handset		
Ambient temperature	0 ~ 40		
Mounting	Wall-mount or desk-top use w/GFW-S stand		
Electrical box	Two-gang box		
Housing	Fire-retardant ABS plastic		
Weight	0.9kg(approx.)		
Unit color	Egg white (5Y9/0.2 Munsell Approximation)		
Capacity	Doorbell: 1		
DESCRIPTION CONCIERGE STATION	FIG. NAME SPEC./SETTING		UNIT mm
MODEL NO. GT-MK	FIG.NO. G57415-3-3	PAGE 3/3	DATE 11 March, 2011
		REVISION 1	AIPHONE