



## PRODUCT DRAWING

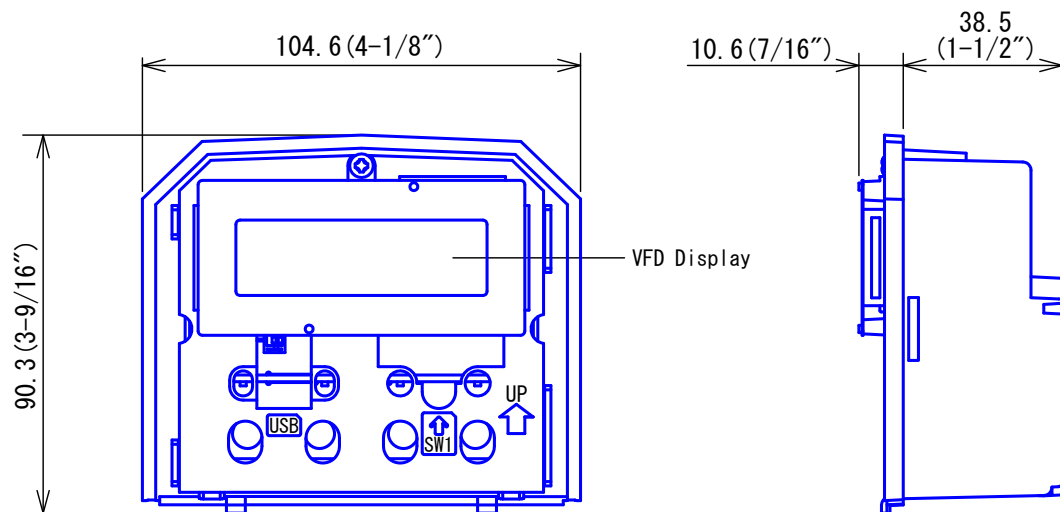


## REAR VIEW

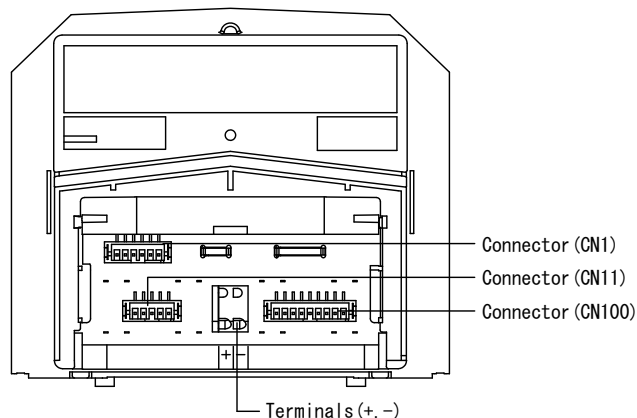

## SPECIFICATIONS

Power source	DC 24V Supplied from a power supply unit (PS-2420 etc.)		
Power consumption	90mA		
Mounting	Mounts on mounting bracket (*) (*) Supplied w/. GT-4F, GF-3F, GF-2F Front frame.		
Ambient temperature	-10~+60°C (+14~+140° F)		
Material	Self-extinguishing ABS resin		
Type of cable	2-conductor cable solid copper & non-braided, PE insulation, 0.65mm dia. ~1.0mm dia.		
Weight	140g (approx.) (0.31 lbs)		
Remarks	Used with GT-NSP-L panel		
DESCRIPTION NAME SCROLL MODULE	FIG. NAME PRODUCT/SPECIFICATIONS		UNIT mm
MODEL NO. GT-NSB	FIG. NO. G55608-1-3	PAGE 1/3	DATE 11 September, 2017 <b>AIPHONE</b>

■ WIRING DIAGRAM

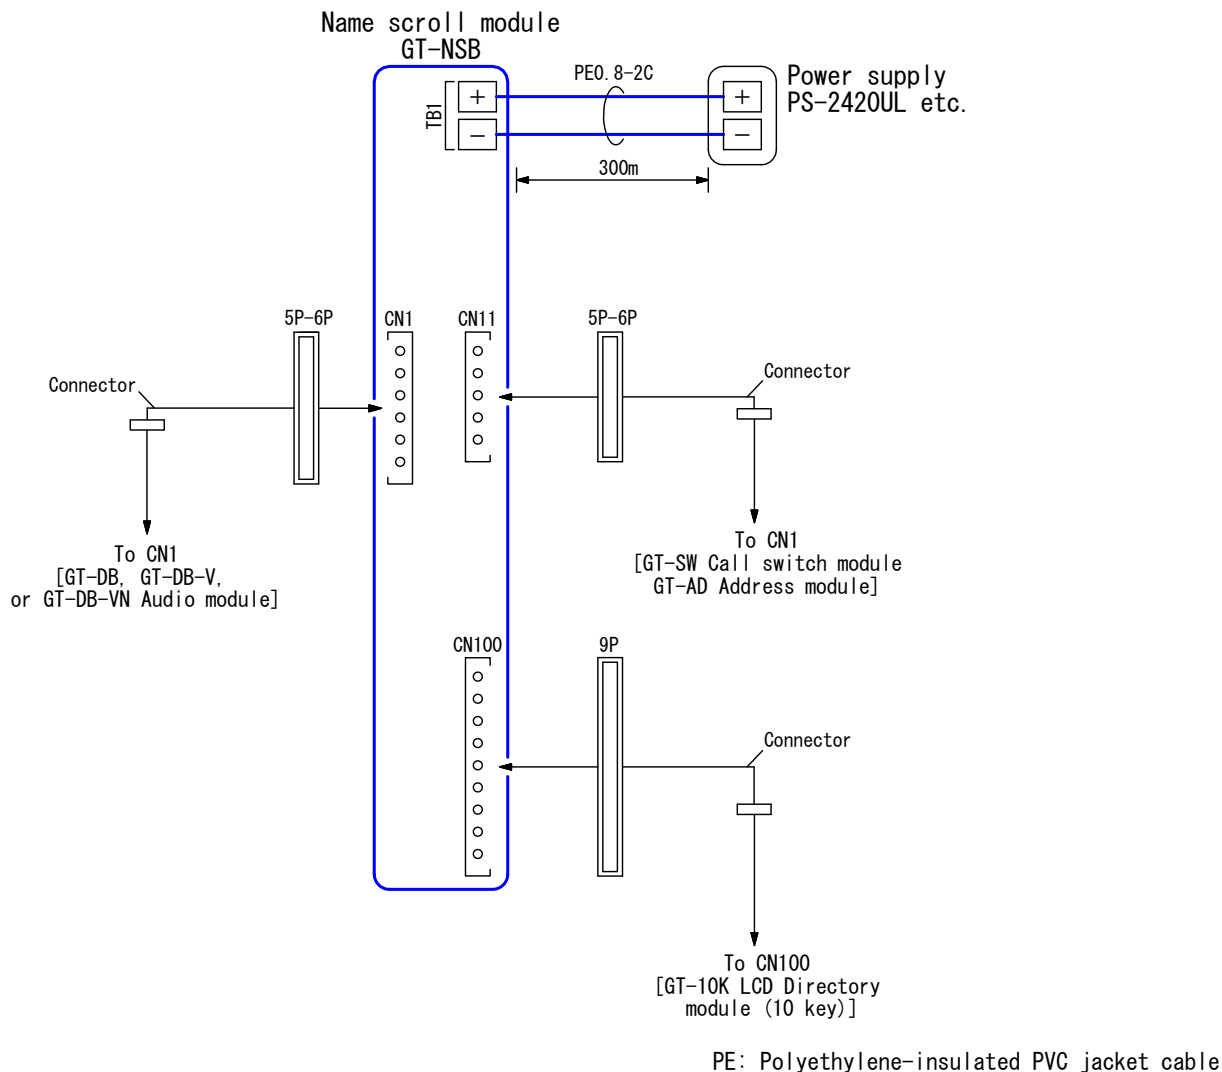

■ FUNCTIONS

- Name search
- Calling Residential station by pressing Call button.
- Cancelling call by pressing Cancel button.
- Setting or releasing linkage with a Residential/tenant stations and Guard stations with GT-10K.
- Setting data transfer available to Guard stations and the other entrance stations with GT-10K.

DESCRIPTION <b>NAME SCROLL MODULE</b>	FIG. NAME <b>WIRING/FUNCTIONS</b>	UNIT mm	DATE 7 June, 2017
MODEL NO. <b>GT-NSB</b>	FIG. NO. G55608-2-3	PAGE 2/3	REVISION 1 <b>AIPHONE</b>

## ■ SETTING

### ● PROGRAM MODE

Item			Setting value/choices	Default
SELECT LANGUAGE			ENGLISH/FRANCAIS/NEDERLANDS/ESPAÑOL/DEUTSCH/NORSK/ITALIANO/TURK/SUOMI	ENGLISH
CHANGE PASSCODE	ADMIN PASSCODE (*1)	NUMBER INPUT	"*"+4DIGITS	*1111
		NFC CARD	—	—
	MANAGER PASSCODE	NUMBER INPUT	"#"+4DIGITS	#2222
		NFC CARD	—	—
TRANSFER DATA (*1)	ENTRANCE		1-16	—
	GUARD STATION		1-4	—
SYSTEM SETTINGS	SECTION INFO (*1) (*2)	SECTION #	—	—
		Section Name	—	—
	RESIDENT INFO	UNIT #	1-6 alphanumeric characters	—
		ENTRANCE #	0-32 alphanumeric characters	—
	GUARD INFO (*1)	GUARD #	1-6 alphanumeric characters	—
		Guard Name	0-32 alphanumeric characters	—
STATION SETTINGS	ACCESS CODE	NUMBER INPUT	4-6 DIGITS	—
		NFC CARD	—	—
	TIMER SETTINGS	OPERATION TIMER (*1)	15-99SEC.	15 SEC.
		PROGRAM TIMER (*1)	30-99SEC.	60 SEC.
		CALL DURATION	30-99SEC.	45 SEC.
	SCROLL SPEED		0-9	5
	SORT SETTING		SORT BY NAME/SORT BY UNIT#	SORT BY NAME
	DISPLAY UNIT #		OFF/ON	ON
	STANDBY SCREEN	GREETING	160 characters	—
		OPERATION	—	—
	CHANGE GREETING		160 characters	—
	SPEED DIAL		1-4 buttons	—
	CAMERA SETTINGS	CAMERA PRESET	1-9	5
		VISIBILITY	OFF/ON	OFF
VERSION (*1)			—	—
QUIT			—	—

\*1. The items cannot be set with the Manager authority.

\*2. For multi building systems only.

DESCRIPTION <b>NAME SCROLL MODULE</b>	FIG. NAME <b>SETTING</b>		UNIT mm	DATE 7 June, 2017
MODEL NO. <b>GT-NSB</b>	FIG. NO. G55608-3-3	PAGE 3/3	REVISION 1	<b>AIPHONE</b>