



■ PRODUCT DRAWING

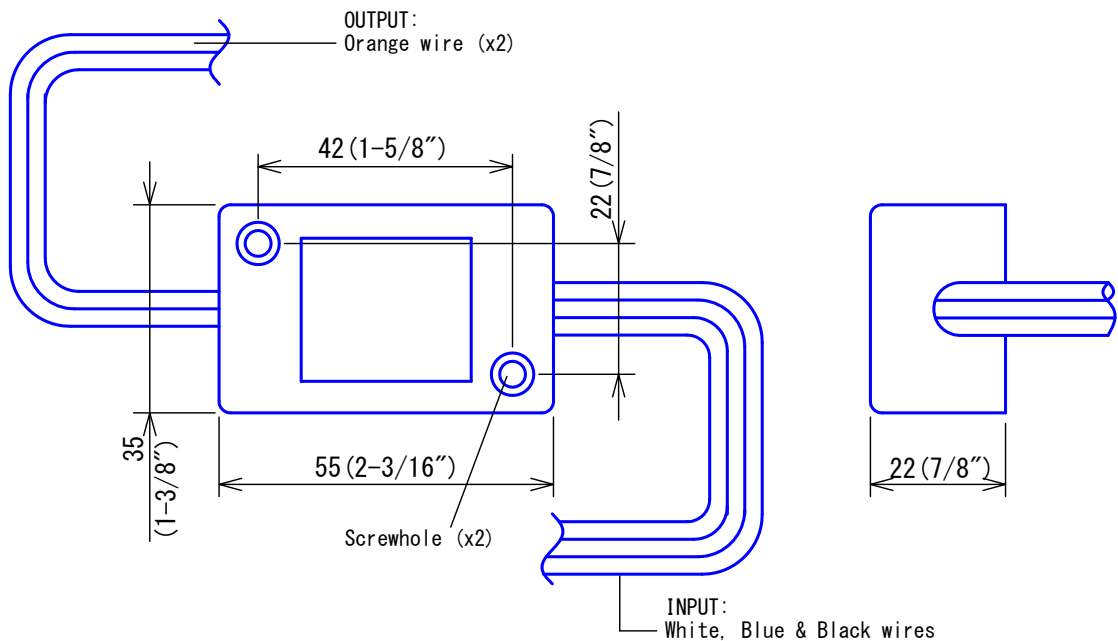

■ WIRING DIAGRAM

• Entrance light control

• Additional buzzer at Residential/tenant station

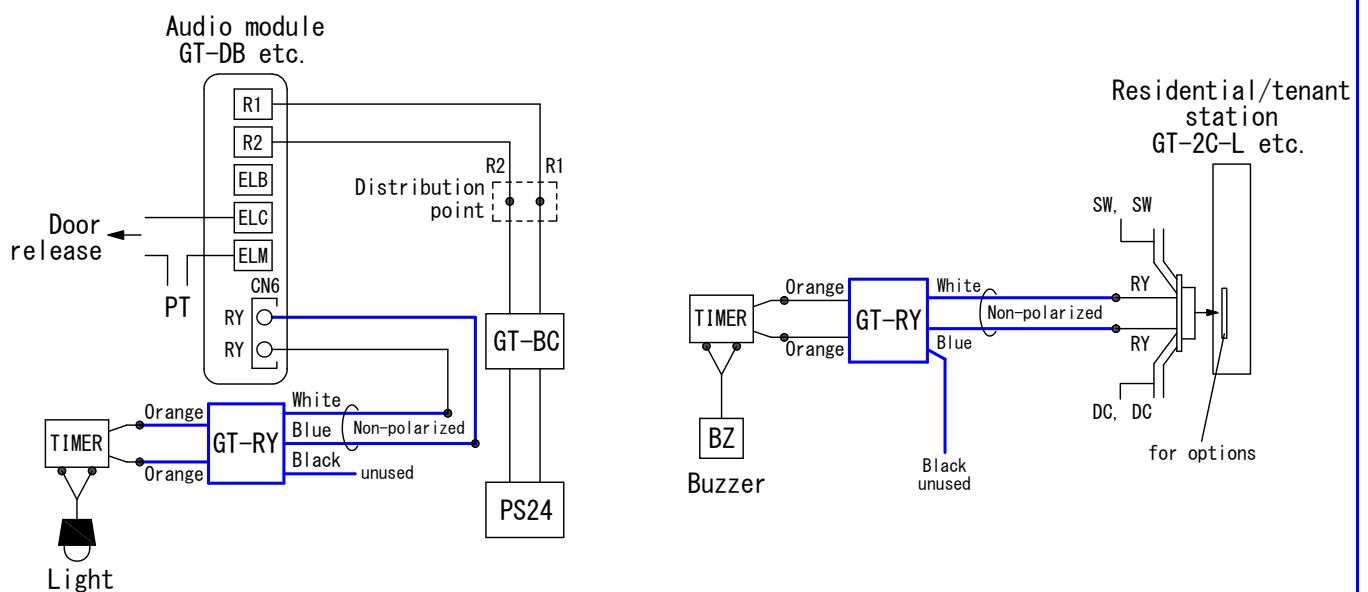

■ SPECIFICATIONS

Power source	DC 24V		
Weight	30g (approx.) (0.067 lbs)		
Contact ratings	Semi-conductor AC 24V, 0.5A. DC 24V, 0.5A.		
Operations	When a GT Entrance station has called, the Entrance light turns on, and is maintained until the Residential/tenant station terminates communication. When a GT Entrance or Guard station has called, buzzer sounds for approx. 10 sec. as well as an ordinary call tone.		
Remarks	One GT-RY required for each Entrance station.		
DESCRIPTION AUXILIARY LIGHT RELAY	FIG. NAME PRODUCT/SPEC. /WIRING	UNIT mm	DATE 12 July, 2017
MODEL NO. GT-RY	FIG. NO. G57567-1-1	PAGE 1/1	REVISION 2
AIPHONE			