



■ PRODUCT DRAWING

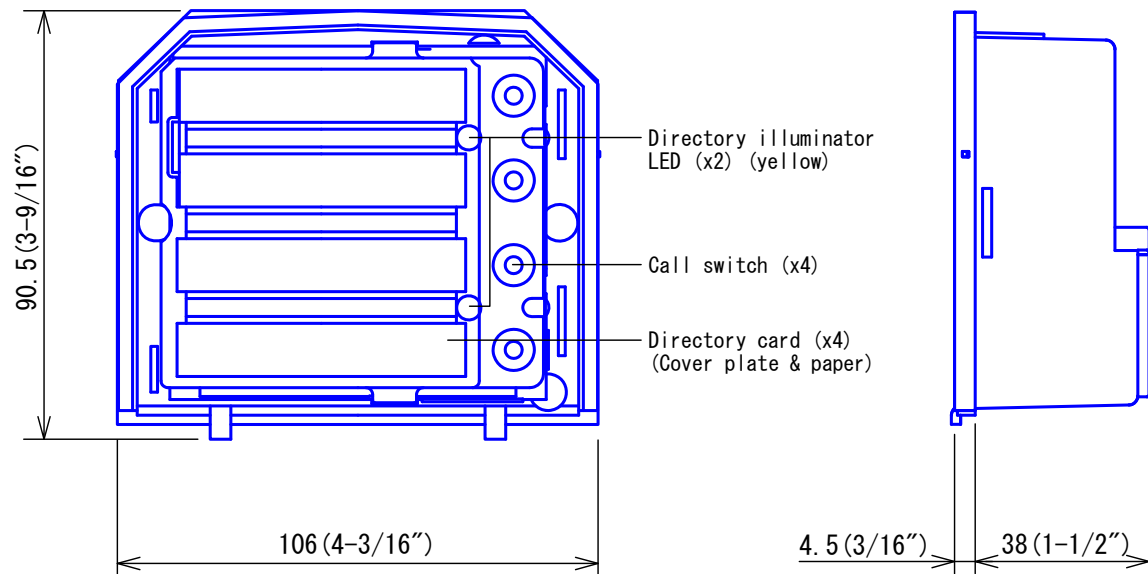

● REAR VIEW

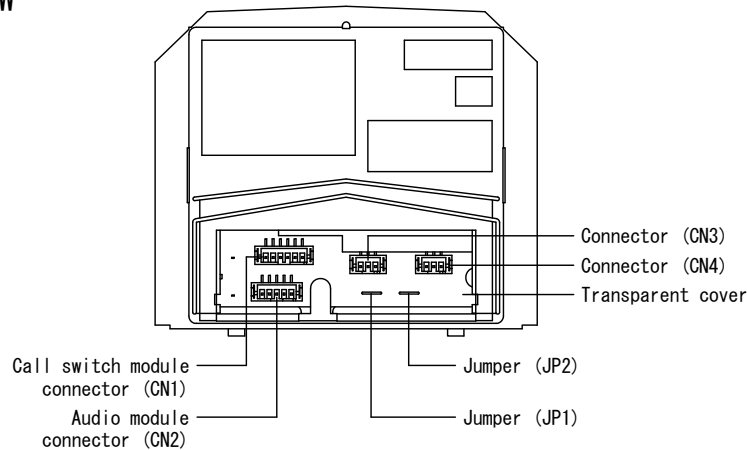

■ RESTRICTIONS

- Max. of 6 modules per entrance station.
For more than 7x GT-SW. installation of additional power supply and special device required.
Contact local AIPHONE distributor.

■ SPECIFICATIONS

Power source	DC 24V supplied from GT-DB, GT-DB-V, GT-DB-VN		
Ambient temperature	-10~+60°C (+14~+140° F)		
Mounting	Mounts on mounting bracket (*) (*) Supplied w/. GF-2F, GF-3F, GT-4F Front frame.		
Capacity	6 units (up to 24-call button) on a module type entrance station.		
Material	Self-extinguishing ABS plastic		
Weight	90g (approx.) (0.199 lbs)		
Remarks	Used with: GF-1P, 2P, 3P, 4P (Panel)		
DESCRIPTION CALL SWITCH MODULE	FIG. NAME PRODUCT/RESTR. /SPEC.	UNIT mm	DATE 5 July, 2017
MODEL NO. GT-SW	FIG. NO. G57404-1-1	PAGE 1/1	REVISION 2

AIPHONE