



## PRODUCT DRAWING

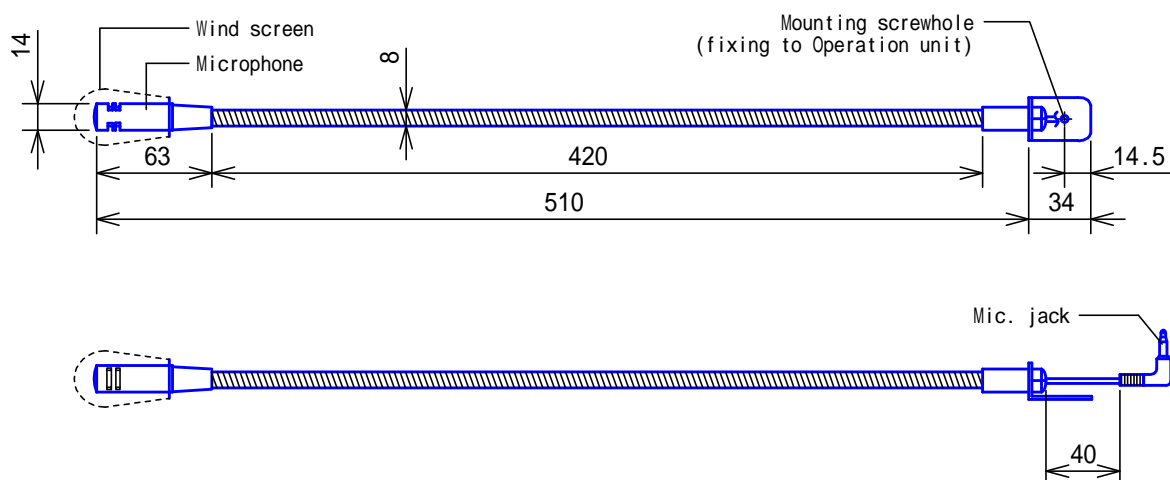

## MOUNTING

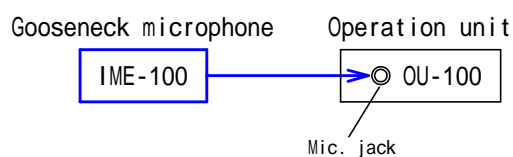

\* IME-100 is attached to the rear side of OU-100 with a mounting screw.

## RESTRICTIONS

Operation unit(OU-100) shall be located on Service counter for ease of operation, and within a reach of interconnecting cable (approx.2m).

When Operation unit(OU-100) has Gooseneck microphone integrated, mount it prior to actual wiring.

## FUNCTIONS

Operator talks handsfree to Customer after TALK switch is turned on.  
(The attached LED is lit).

## SPECIFICATIONS

Microphone	Condensor-microphone, unidirectional. Input sensitivity: -47dB			
Gooseneck	510mm long			
Weight	190g(approx.)			
DESCRIPTION GOOSENECK MICROPHONE (Security window intercom)	FIG. NAME PRODUCT/SPEC./RESTR./FCN.	UNIT mm	DATE 6 June, 2005	
MODEL NO. IME-100	FIG.NO. 01780301-1-1	PAGE 1/1	REVISION 1	<b>AIPHONE</b>