

## Product Name

# R1

(External driver)

## Technical description

This fitting is suitable for wall or ceiling application. R1 is equipped with the latest LED technology that, combined with the choice of different optics, it ensures high performance lighting in the name of energy sustainability. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with a painted galvanised steel bracket and goniometer in die-cast aluminum and powder painted. Stainless steel screws AISI 304. Silicone gaskets. Silicone gaskets. On request, tempered glass sodium-calcium type, 3 mm thickness, 91% transparency and IK07.

LED light source (lumileds), colour temperature (4000 K Neutral White).

High coefficient of performance chromatic CRI>80. Optic in optical PC.

## Supply

External driver in Blank, dimmable or DALI.

Voltage 220-240V AC 50/60Hz.

Temperature -40° +45°

## Installation

Wall and ceiling.

## Applications

Facades decoration, Commercial areas, Parkings, Warehouses, Advertising installations

## Size (mm)



348 x 190 x 94

## Colour

Dark grey **4**

## Decay of the luminous flux

≥100.000 hr L80B20

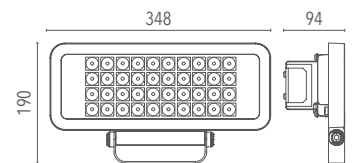

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
<b>L00R140H7BL40110</b>	LED	110 W	13310 lm	17930 lm	4000 K	>80	H7	Dark grey	-
<b>L00R140H7DI40110</b>	LED	110 W	13310 lm	17930 lm	4000 K	>80	H7	Dark grey	Dimmer
<b>L00R140H7DA40110</b>	LED	110 W	13310 lm	17930 lm	4000 K	>80	H7	Dark grey	DALI

## Accessories



Cable with connector  
Ca. 2m/Co. IP 2 poli  
LKITA00000000040  
Ca. 2m/Co. IP 3 poli  
LKITA00000000041



Ceiling Kit  
LKITA00000000060  
Galvanised iron  
LKITA00000000061  
Inox



Pole connection A  
Max 4 x R  
LKITA00000040001



Fast connector  
IP 2 poles  
LKITA00000000017



Fast connector  
IP 3 poles  
LKITA00000000003



Fast connector  
IP 5 poles  
LKITA00000000103



Pole mounting  
bracket  
LKITA00000000002

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.